


Aluminum Neutral Link

- Aluminum neutral links are manufactured from high strength aluminum alloy
- For use in variety of neutral and grounding applications
- Aluminum neutral links are tin plated
- Screws are made of mild steel and plated
- Aluminum neutral link are dual for Copper or Aluminum Conductors

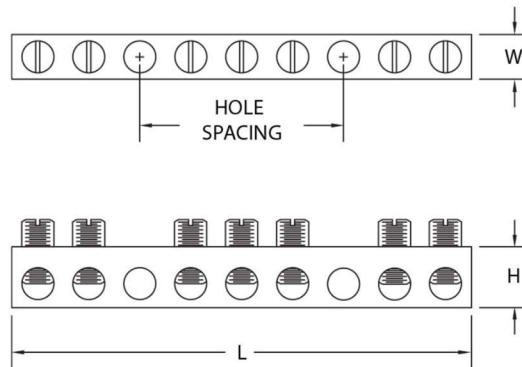

Standard Dimensions

Conductor Range	No. of Circuits	Total No. of Holes	Approximate Dimension			Hole Spacing	Mounting Hole Position
			L	W	H		
14-4	2	3	.95	.31	.44	.31	2
	4	5	1.57	.31	.44	.31	3
	5	6	1.88	.31	.44	.31	3
	6	7	2.25	.31	.44	.31	4
	4	6	1.88	.31	.44	.31	1 & 4
	5	7	2.25	.31	.44	.31	1 & 7
	5	7	2.25	.31	.44	.31	2 & 6
	6	8	2.56	.31	.44	.31	4 & 7
	7	9	2.87	.31	.44	.31	3 & 7
	9	11	3.50	.31	.44	.31	1 & 11
	10	12	3.81	.31	.44	.31	1 & 12
	12	14	4.43	.31	.44	.31	1 & 14
	15	17	5.37	.31	.44	.31	1 & 17
20	22	6.93	.31	.44	.31	1 & 22	
190	190	60.00	.31	.44	.31	-	
14-2	10	12	12	.38	.50	.34	3 & 11
14-2/0	2	3	1.75	.56	.75	.60	2
	3	5	2.95	.56	.75	.60	2 & 4
	6	8	4.75	.56	.75	.60	1 & 8

* We manufacture as per custom specification / technical drawing / sample piece. Please send us Inquiry for more information. (sales@shreegangaent.com)